

# ONDA<sup>®</sup>

## VALVE & WATER METER

### ROTARY-VANE DRY-DIAL MAGNET-DRIVE WATER METER NANO

#### FEATURE :




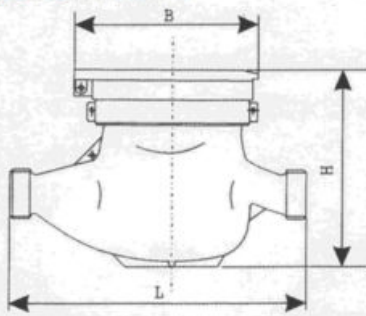
- \* DRY - DIAL
- \* MULTI - JET
- \* MAGNETIC DRIVE
- \* ANTIMAGNETIC CONSTRUCTION
- \* MEASURING ACCURACY CONFORM TO ISO 4064 CLASS B STANDARD



# ONDA<sup>®</sup>

## VALVE & WATER METER

### TECHNICAL DATA

Nominal Diameter	DN	mm	15	20	25
Nominal Pressure	PN	Bar	10	10	10
Smallest Readable	Vol.	1	0.1	0.1	0.1
Registration Capacity		m <sup>3</sup>	99999	99999	99999
Operating Temperature	Max	°C	50	50	50
Installation Position		Pipe Meter Head			
Maximal Flow Rate	Qmax	m <sup>3</sup> /h	3	5	7
Nominal Flow Rate	Qn		1.5	2.5	3.5
Transitional Flow Rate	Qt		0.12	0.20	0.28
Minimum Flow Rate	Qmin		0.03	0.05	0.07
Error Limits	Qmax..Qt	%	< +2	< +2	< +2
	Qmin		< +5	< +5	< +5
Dimensions in mm :		L :	165	190	260
		B :	99	99	104
		H :	104	106	120

\* Subject to modification without notice

## PT.HARAPAN UTAMA INDONESIA

Gedung LTC Glodok Lt. 1 Blok C 32 No. 9, Jl. Hayam Wuruk No. 127  
Jakarta Barat

Telp : 021-62200523 || 021-62320546 || 021-62303292 || 021-62317837

Fax : 021-62303292

Email : [salesflowmeter@gmail.com](mailto:salesflowmeter@gmail.com)